



## JM EPDM R 60 mil

**Polyester-Reinforced  
Ethylene Propylene Diene Monomer Membrane**

**Meets the requirements of ASTM D 4637, Type II**

### Features and Components

**Membrane:** Cured EPDM (ethylene propylene diene monomer) reinforced with a tough 1,000+ denier polyester mat. Excellent puncture and hail resistance.


**Fully Extruded:** Produces fewer air voids, more uniform thickness and smoother sheets.

**Vulcanization Process:** Combines two layers of membrane to produce a fully cross-linked monolithic membrane.

**Polymer Formulation:** Performs in extreme temperature climates and withstands differential movement (elongation).

**UV-Stabilization Properties:** Offers outstanding ozone and weather resistance delivering one of the longest service lives available.

**Technical Expertise:** Backed by 30+ years of EPDM experience and installations.

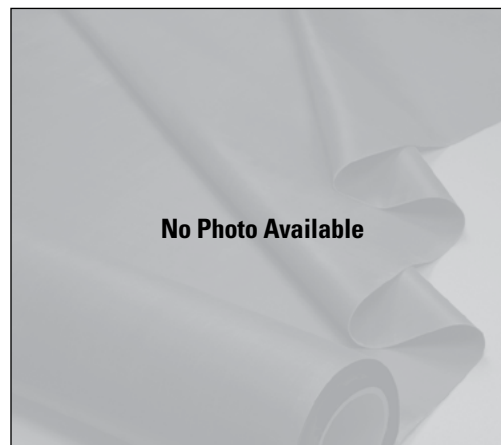

### Color

Black

### System Compatibility Please refer to the specific JM Specification sheets for details.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
	Do not use with Multi-Ply systems							

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
	Compatible with the selected Single Ply systems above						

**Key:** HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

### Energy and the Environment

Property	Value
Reflectivity* (ASTM C 1549)	0.06
Emissivity* (ASTM C 1371)	0.88
Postconsumer Recycled Content	0%
Preconsumer Recycled Content	0%

\*Test methods for reflectivity and emissivity are LEED®- and CRRC®-approved.


### Peak Advantage® Guarantee Information

Enhanced guarantees are now available on certain systems for wind and puncture. Consult your local sales representative for more information and for specific guarantee terms and costs.

Product	Guarantee Term
When used in most JM EPDM Systems*	Up to 20 years

\*Contact JM Technical Services for specific systems.

### Installation/Application

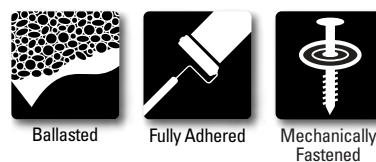

Refer to JM EPDM Application Guides and Detail Drawings for instructions.

### Packaging and Dimensions

Roll Size	10' x 100' (3.05 m x 30.48 m)
Roll Coverage	1000 ft² (92.66 m²)
Extruded in:	Milan, OH

\*Assumes 48' flatbed truck.

### Codes and Approvals



Refer to the Material Safety Data Sheet and product label prior to using this product. The Material Safety Data Sheet is available by calling (800) 922-5922 or on the Web at [www.jm.com/roofing](http://www.jm.com/roofing).



# JM EPDM R 60 mil

**Polyester-Reinforced  
Ethylene Propylene Diene Monomer Membrane**

**Meets the requirements of ASTM D 4637, Type II**

## Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 4637, Type II	JM EPDM – R 60 mil
Strength	Breaking Strength (lbf)	D 751 A	> = 90	251
	Elongation at Fabric Break, Ultimate (%)	D 751 A	> = 15	MD 37, XMD 37*
	Elongation, Ultimate (%)	D 412	> = 250	452
	Tear Strength (lbf)	D 751 B	> = 10	110
	Dynamic Puncture Resistance, 10J, Type II	D 5635	pass	pass
	Static Puncture Resistance, 55.1 lbf, Type II	D 5602	pass	pass
Longevity	Overall Sheet Thickness (in.)	D 751	+/- 10%	pass
	Thickness Over Scrim, Weathering Side (in.)	D 7635	0.015	0.026
	Brittleness Point (°F)	D 2137	< = -49	pass
	Ozone Resistance	D 1149	pass	pass
	Water Absorption (mass %)	D 471	< = 8	0.3
Heat Aged Performance	Heat Aged 670 hrs @ 240°F	D 573		
	Breaking Strength (lbf)	D 751	> = 80	232
	Elongation, Ultimate (%)	D 412	> = 200	270
	Linear Dimensional Change (%)	D 1204	< ± 1	0.06
Weathering Performance	Weathering Resistance, 5040 KJ/(m <sup>2</sup> -nm) @ 340 nm	D 4637 / G 151 / G 155		
	Visual Inspection	—	pass	pass

\* MD = Machine Direction  
XMD = Cross-Machine Direction